




UHF RFID

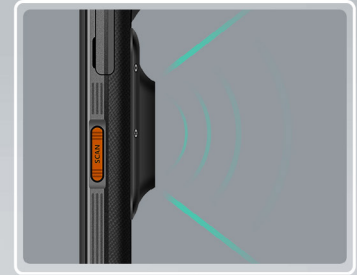

C71

**Mobile Computer
UHF RFID**



Android



4G



WiFi



Bluetooth



UHF



1D Barcode



2D Barcode



IRIS



NFC



Camera



GPS

Chainway C71 is an Android rugged mobile computer. It can be configured with internal UHF module with 1.5dBi circularly polarized antenna. With its powerful processor and wireless connections, you can find this easy-to-deploy device an exceptionally valuable helper to increase working efficiency and productivity in retail, logistics and healthcare.



Specification

Performance	
CPU	Cortex-A53 2.5 / 2.3 GHz Octa-core
RAM+ROM	3 GB + 32 GB / 4 GB + 64 GB (optional)
Expansion	Supports up to 128 GB Micro SD card
Operating System	Android 8.1; GMS, FOTA, Soti MobiControl, SafeUEM supported
	Android 11; GMS, FOTA, Soti MobiControl, SafeUEM supported. Committed support for a future upgrade to Android 12, 13, and Android 14 pending feasibility

Communication	
Android 8.1	
WLAN	IEEE802.11 a/b/g/n/ac, 2.4G/5G dual-band, internal antenna
	2G: 900/1800 MHz
	3G: WCDMA: B1,B8
WWAN (China)	CDMA2000 EVDO: BC0
	TD-SCDMA: B34,B39
	4G: B1,B3,B5,B8,B34,B38,B39,B40,B41
WWAN (Europe)	2G: 850/900/1800/1900 MHz
	3G: B1,B2,B4,B5,B8
	4G: B1,B3,B5,B7,B8,B20,B40
WWAN(America)	2G: 850/900/1800/1900 MHz
	3G: B1,B2,B4,B5,B8
	4G: B2,B4,B7,B12,B17,B25,B66
WWAN (Others)	Depending on the country's ISP
Bluetooth	Bluetooth v2.1+EDR,3.0+HS,v4.1+HS
GNSS	GPS/AGPS, GLONASS, BeiDou; internal antenna
Android 11	
WLAN	IEEE802.11 a/b/g/n/ac, 2.4G/5G dual-band, internal antenna
	2G: GSM850/GSM900/DCS1800/PCS1900
	3G: WCDMA: B1/B2/B4/B5/B8 CDMA2000 EVDO: BC0 TD-SCDMA: A/F
WWAN	4G: B1/B2/B3/B4/B5/B7/B8/B12/B17/B20/B28A/B28B/B34/B38/B39/B40/B41
	Bluetooth 5.0
GNSS	GPS/AGPS, GLONASS, BeiDou; internal antenna

Physical Characteristics	
Dimensions	164.2 x 78.8 x 17.5 mm / 6.46 x 3.10 x 0.69 in.
Weight	321 g / 11.32 oz.
Display	5.2" IPS LTPS 1920 x 1080
Touch Panel	Coming Gorilla Glass, multi-touch panel, gloves and wet hands supported
	Main battery: Li-ion, rechargeable, 5000mAh
Power	Standby: over 350 hours
	Continuous use: over 12 hours (depending on user environment) Charging time: 3-4 hours (with standard adaptor and USB cable)
Expansion Slot	1 slot for Nano SIM card, 1 slot for Nano SIM or TF card
Interfaces	USB 2.0 Type-C, OTG, Type-C headphones supported
Audio	Speaker, 2 microphones
Keypad	4 front keys, 1 power key, 2 scan keys, 1 multifunctional key
Sensors	Light sensor, proximity sensor, gravity sensor

Developing Environment	
SDK	Chainway Development Kit
Language	Java
Tool	Eclipse / Android Studio

User Environment	
Operating Temp.	-4 °F to 122 °F / -20 °C to 50 °C
Storage Temp.	-40 °F to 158 °F / -40 °C to 70 °C
Humidity	5% RH - 95% RH non condensing
Drop Specification	Multiple 1.8 m / 5.91 ft. drops (at least 20 times) to the concrete across the operating temperature range
Tumble Specification	1000 x 0.5m / 1.64 ft. falls at room temperature
Sealing	IP65 / IP67 per IEC sealing specifications
ESD	±15 KV air discharge, ±6 KV conductive discharge

Data Collection	
UHF RFID	
Engine	CM-Q module ; CM310-1 module based on Impinj E310
Frequency	865-868 MHz / 920-925 MHz / 902-928 MHz
Protocol	EPC C1 GEN2 / ISO18000-6C
Antenna	Circular polarization (1.5 dBi)
Power	1 W (+19 dBm to +30 dBm adjustable)
R/W range	3 m
* Ranges and rates depend on tags and environment	
Camera	
Rear Camera	13 MP Autofocus with flash
Front Camera (optional)	5 MP camera
NFC	
Frequency	13.56 MHz
Protocol	ISO14443A/B, ISO15693, NFC-IP1, NFC-IP2, etc.
Chips	M1 card (S50, S70), CPU card, NFC tags, etc.
Range	2-4 cm
Barcode Scanning (optional)	
1D Linear Scanner	Zebra: SE965; Honeywell: N4313
1D Symbologies	UPC/EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 of 5, Chinese 2 of 5, Codabar, MSI, RSS, etc.
2D Imager Scanner	Zebra: SE4710 / SE4750 / SE4750MR; Honeywell: N6603
2D Symbologies	PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal, Dutch Postal (KIX), etc.
Iris (optional)	
Rate	< 150 ms
Range	20-40 cm
FAR	1/10000000
Protocol	ISO/IEC 19794-6, GB/T 20979-2007
Accessories	
Standard	AC Adaptor, USB Cable, Lanyard, etc.
Optional	Cradle, Holster, etc.
* For detailed specification, please check Accessory Guide.	

Notice: Product specifications are subject to change without prior notice. / Model: C71 UHF / Update Date: 2022-01-14

CHAINWAY®

Shenzhen Chainway Information Technology Co., Ltd

Address: 9F, Building2, Phase 2, Gaoxinqi Industrial Park, Liuxian 1st Rd., Bao'an District, Shenzhen, Guangdong 518102, China

Tel: 0086-755-23223316

Fax: 0086-755-23223310

Email: sales@chainway.cn

Web: http://www.chainway.net