



Omni-ID® Adept 360°

The Omni-ID Adept 360° is a UHF RFID tag for the most harsh environmental applications. The tag is encased in an industrial steel frame with a tether attachment designed to meet the needs of oil and gas users and other heavy industry applications. The Omni-ID 360° is available with a range of options including a surface etching/printing finishing option and a dual technology option .


Building Intelligent Supply Chains

With its steel framework, 360° read angle and long read range the Omni-ID Adept 360° is ideal in heavy industry applications for tracking:

- ▶ Slings.
- ▶ Shackles.
- ▶ Heavy machinery.

Physical Specifications

| | |
|--------------------------|----------------------------------|
| Encasement | Steel frame |
| Size (mm) (tolerance) | 136.5 x 48 x 5.5 (+/- 1.0) |
| Size (in) (tolerance) | 5.4 x 1.9 x 0.217 (+/-0.04) |
| Weight (g) | 126.0 |

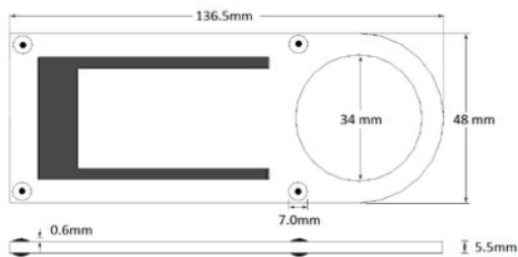

Dimensions stated in mm

RF Specifications


| | |
|-------------------------------------------|---------------------------------------------------------------------------------|
| Protocol | UHF - EPC Class 1 Gen2 HF (Opt.) - ISO 15693 |
| Frequency Range (MHz) | 860-930MHz (GS) 13.56MHz (HF opt.) |
| Read Range (Fixed reader) ¹ | Up to 10.0m (UHF) Up to 0.1m (HF opt) |
| Read Range (Handheld reader) ¹ | Up to 5.0m (UHF) Up to 0.1m (HF opt) |
| Material Compatibility | Any |
| IC Type (chip) | UHF - Alien H3 HF (opt.) - NXP I-Code |
| Memory ² | UHF EPC - 96bits UHF User - 512bits UHF TID - 64bits HF (opt.) - 1Kbit |

1. Quoted performance achieved using standard testing methodology. Read range will vary with reader hardware and output power.

2. EPC and User memory are reprogrammable, TID is locked at point of manufacture.

Radiation Patterns

Tethered in air

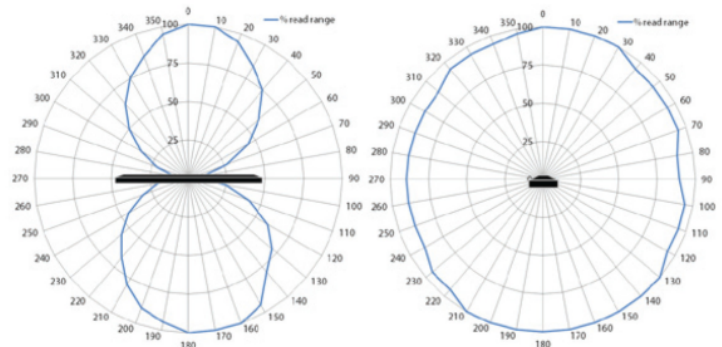

Related Products and Services

- ▶ **Omni-ID Dura 600** - Small form factor, High impact resistant, on-metal RFID tag for adhesive attachment to industrial assets.
- ▶ **Omni-ID Dura 1500**- Long range, high durability RFID tag product for heavy industry applications involving metal.
- ▶ **Omni-ID Adept 400** - High impact Resistance RFID tag for easy strap or adhesive attachment to industrial equipment.
- ▶ **Service Bureau** - Omni-ID offers a full service bureau for printing and pre-encoding Omni-ID tags at point of manufacture.



Environmental Specifications

| | |
|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Operating Temperature | -40°C to +85°C |
| Long term Max Temperature ¹ exposure - (days,weeks,years) | +120°C |
| Short term Max Temperature ¹ exposure - (minutes,hours) | +140°C |
| IP Rating | IP68 |
| Shock and Vibration | MIL STD 810-F |
| Impact ² | >25kg from 1m |
| Attachment | Tether hole (std) |
| Certifications | RoHS approved CE approved ATEX/IECEX certified (option) US&Canada (C1D1/D2) certified (option) |
| Warranty | 1 year |

1. Excludes adhesive options, consult adhesive data sheets for recommended temperature ratings.
2. Testing methodology available on request

Ordering Information

| | |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Order Numbers | 032- GS :304 (ATEX/IECEX certified) :305 (HF module) :307 (US&Canada (C1D1/D2) certified) :704 (Single side print) :705 (Double side print) |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|

