

# AD Belt M750

## Overview

---

**Frequency Band**

UHF 860 - 960 MHz

---

**Chip**

Impinj M750

---

**Antenna Dimensions**

70 x 14 mm / 2.76 x 0.55 in

---

**International Standard**

ISO 18000-63, EPC Class 1 Gen 2

---

**Industry Segments**

Apparel  
Logistics  
Automotive

---

**Applications**

Home Essentials  
Supply Chain Management  
Inventory and Logistics

---

**RoHS**

EU Directive 2011/65/EC and Directive  
(EU) 2015/863

---

**REACH**

Regulation (EC) No 1907/2006



## High performance condensed to the max

AD Belt M750 inlays and tags are designed for global logistics, industrial and supply-chain applications, offering excellent performance on difficult-to-tag or low detuning materials such as cardboard and plastic, and in other demanding, close-coupling environments. With a compact 73 mm (2.8 inch) form factor, easily convertible into end-application usage, they are available in dry, wet and paper tag delivery formats.

The AD Belt M700 series features Impinj's M750 IC, offering high performance across different materials and challenging environments due to enhanced adaptive RF tuning features. It also has improved read and write sensitivity, with very fast and accurate reading within a large population of tags, and a privacy mode which enables loss prevention and protects consumer privacy by making a tag invisible to RAIN readers.

AD Belt M750 is included on the approved retail application inlay list by the RFID Research Center (ARC) of the University of Auburn, and complies with categories F, G, I, K, M, N, L, J, Q, W1, W2, W3, W4, W5 and W6.


The Impinj M750 IC has both 96-bit EPC memory and 32-bit user memory. The IC is compatible with the global GS1 UHF Gen2v2 standard which ISO/IEC standardized as 18000-63.

Our inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management. This ensures a reliable and state-of-the-art product that meets a variety of application needs, where high performance is a critical parameter.


## Technical features

Chip	Impinj M750		
EPC and User Memory	96-bit and 32-bit		
TID Memory	96 bits of Serialized TID with 48-bit serial number		
Product Code	3007491	3007534	3007492
Delivery Format	Dry inlay	Wet inlay	Label
Die-Cut Dimension	-	73 x 17 mm / 2.87 x 0.67 in	73 x 17 mm / 2.87 x 0.67 in
Inlay Substrate	PET	PET	PET
Face Sheet	-	Clear PET	Mid-gloss paper
Inlay Liner Material	-	Siliconized paper	Siliconized paper
Standard Pitch	20 mm / 0.787 in	20 mm / 0.787 in	20 mm / 0.787 in
Web Width	80 mm / 3 in	80 mm / 3 in	80 mm / 3 in
Core Size	76 mm / 3 in	76 mm / 3 in	76 mm / 3 in
Quantity / Reel	20,000 pcs/reel	20,000 pcs/reel	5,000 pcs/reel
Operating Temperature	-40 °C to 85 °C / -40 °F to 185 °F		

### Orientation sensitivity

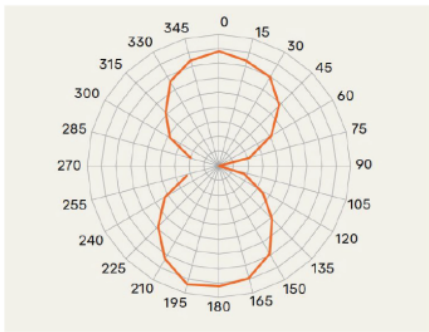

### Read range

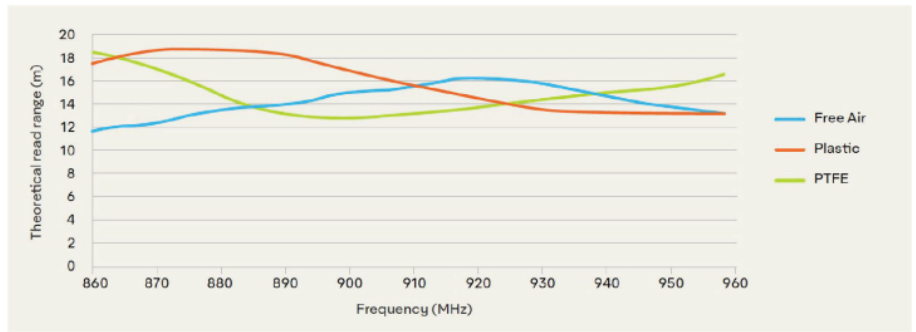

All graphs are indicative: performance in real life applications may vary.



© 2021 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

**Warranty:** Please refer to Avery Dennison standard terms and conditions: [rfid.averydennison.com/termsandconditions](http://rfid.averydennison.com/termsandconditions)

**Care and handling:** RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

**Applications:** This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

